


LEVER TYPE

MATERIAL	Insulated lever													
LEVER TYPE	C							CA						
DIMENSIONS														
LENGTH(L)	X	7	1	2	3	5	6			X	8	9		
	L	5	10	12.5	15	18	20			L	5	10		
	F	5	5	5	5	5	5							

PC.B. MOUNTING HOLE DETAIL

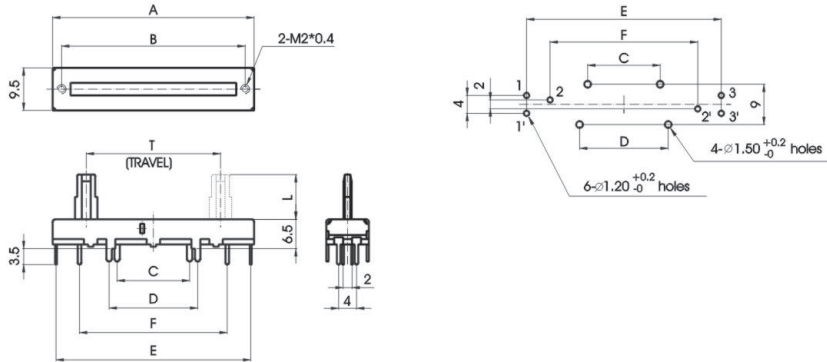

MODEL	T	A	B	C	D	E	F
S1533	15	30	26	/	/	28.5	18
S2033	20	35	31	6.2	9.8	33.5	23
S3033	30	45	41	16.2	19.8	43.5	33
S4533	45	60	56	/	/	58.5	48

Mechanical characteristics: 機械的性能

Operating force 作動力	0.2~2N(20~200gf)
Stopper strength 作動停止強度	50N(5kgf) {measuring point=5mm}
Lever wobble 柄的晃動	2(2*L)/20 mm max. (L:Lever length both side) L: 兩側柄長
Bending moment 瞬間彎曲	25mN.m(250gf.cm)
Push pull strength 軸推拉強度	30N (3kgf)
Click slip-out force C.C. 脫出力	0.2~2N(20~200gf)
Lever deviation 柄的偏心量	0.5 max. (one side) 單側

Electrical characteristics: 電氣的性能

Total resistance 總阻值	5KΩ ~2MΩ							
Total resistance tolerance 總阻值容許差	±20% (more than 1MΩ ±30%)							
Resistance taper 阻值線性	A,B,C,D,K,W							
Insulation resistance 絕緣抵抗	100MΩ min. at 250V DC.							
Withstand voltage 耐電壓	AC 300V (1 minute)							
Rated power 定格電力 (w)	Taper	Travel	15 mm	20 mm	30 mm	45 mm		
		B	Single	0.05	0.1	0.2	0.25	
	Dual		0.025	0.05	0.1	0.125		
	Except B (B以外)		Single	0.025	0.05	0.1	0.125	
		Dual	0.012	0.025	0.05	0.06		
Max. operating voltage (AC V) 最高使用電壓	B		100	200	200	200		
	Except B (B以外)		50	150	150	150		
Residual resistance 殘留阻值	Total Resistance 總阻值		10KΩ	50KΩ	100KΩ	200KΩ	500KΩ	1MΩ
	Between terminals 1-2 端子1~2間		10Ω	10Ω	10Ω	20Ω	20Ω	20Ω
	Between terminals 2-3 端子2~3間		10Ω	10Ω	20Ω	20Ω	50Ω	50Ω

Durability: 耐久的性能

Sliding life 滑動壽命	15,000 cycles
----------------------	---------------